




OUTLINE DRAWING OF Washer Mount T/C with Flexible Braid

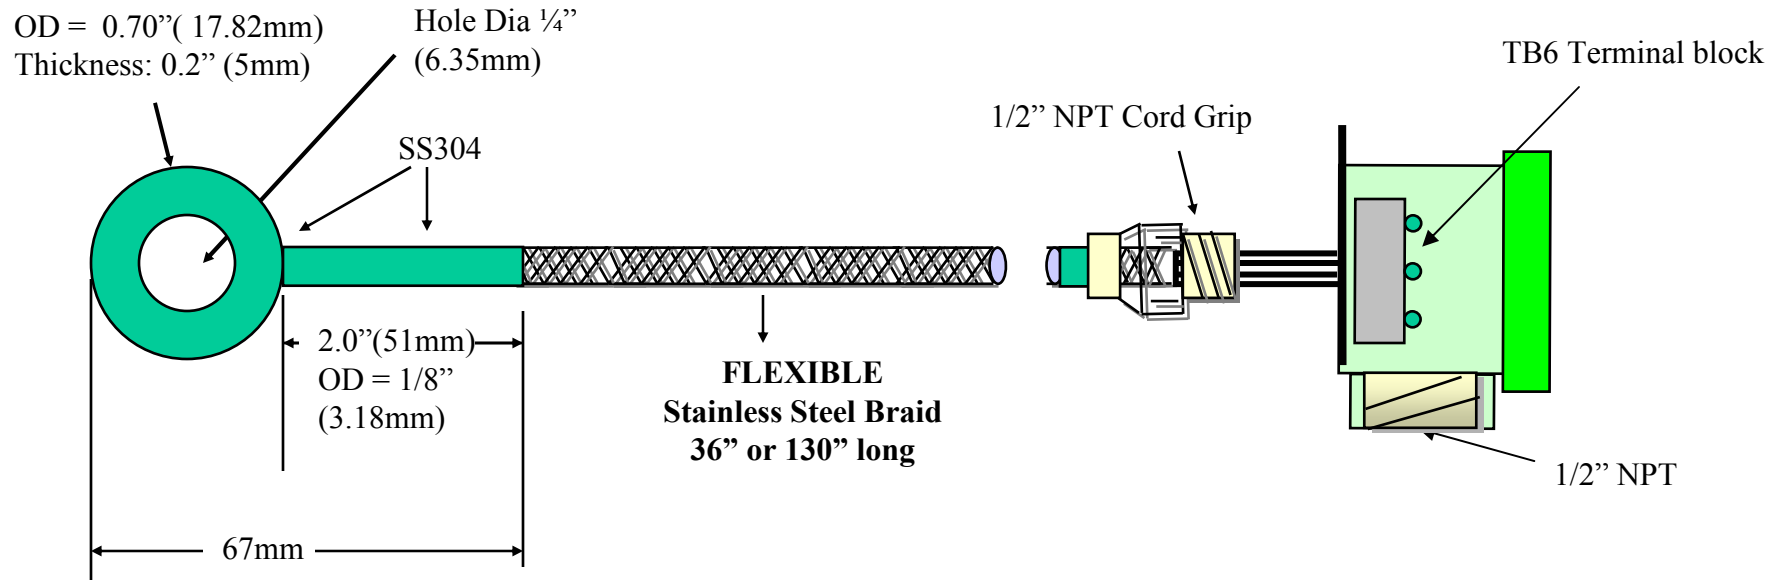

Model #: SEN/ TC-KU/ S304/ CL2 -WASHMNT -LL36 -TB6- .5GRIP- SPL -[LH2NS]

- 1) Sensor is T/C type "K" ungrounded in a washer mount style. Matl is SS304.
- 2) The straight tube with to washer disc length is 2" long with an OD of 1/8.
- 3) Leads wires are Teflon insulated with Stainless Steel over braid.
- 4) The back of the lead wire has a 1/2" NPT cord grip for ease of connection to LH2NS housing.
LH housing has to nos of 1/2"NPTF entries, with a 6 pole ceramic terminal block embedded.